


CVBS HDCVI™

HDTVI AHD

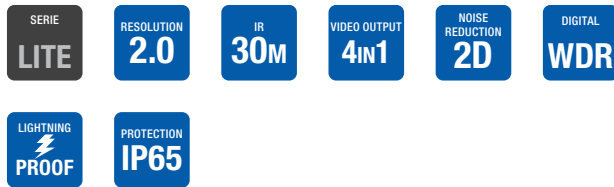

FEATURES


- 1080P HD resolution with Lowlight CMOS sensor
- IR illumination up to 30 meters
- 2,8 ~ 12 mm varifocal lens
- OSD menu
- Transmission distance up to 300 meters
- AWB, AGC, BLC, Digital WDR, 2D-NR, Smart IR
- 4 in 1 output (DIP switch): CVBS, HDCVI, HDTVI, AHD
- IP65
- Protection against voltage surges
- 3AXIS: wall and ceiling installation

ACCESSORIES



HYU-258
Connection base

DIMENSIONS



CAMERA

Image sensor	1/2.7 Low Light CMOS, 2.1 MP
Effective pixels	1936(H) x 1096(V)
Frames per second	PAL/NTSC: 25/30 fps @1080P
Electronic shutter	Auto, 1/25s ~ 1/50.000s
IR illumination	6 led array: 20 ~ 30 meters
Minimum illumination	0,02 lux F1,2 (AGC ON) / 0 lux IR ON
Video output	AHD, HDCVI, HDTVI, CVBS (DIP switch)

LENS

Lens	2,8 ~ 12 mm
------	-------------

FUNCTIONS

Day/night	Auto, Color, B/W, Ext
OSD menu	Supported
White balance	AWB, ATW, indoor, outdoor, manual
Gain control	AGC
Backlight compensation	BLC, Digital WDR
Noise reduction	2D-NR

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±10%) /420 mA
Consumption	<5W
Working temperature	-20°C ~ +60°C
RH	10% ~ 90% HR
Transmission distance	Up to 300 meters (theoretical) via 75-3 coaxial cable
Protection	IP65

PHYSICAL FEATURES

Case	PVC & metal
Dimensions	Ø125 x 100 mm